




Functional Specifications:

RFID Protocol:	EPC Class1 Gen2, ISO18000-6C Frequency:
	(US) 902-928MHz, (EU) 865-868MHz IC
type:	Alien Higgs-4
Memory:	EPC 128bits, USER 128bits, TID64bits
Write Cycles:	100,000times
Functionality:	Read/write Data
Retention:	Up to 50 Years
Applicable Surface:	Metal Surfaces
Read Range : (Fix Reader)	250cm - (US) 902-928MHz, on metal; 270cm - (EU) 865-868MHz, on metal;
Read Range : (Handheld Reader)	120cm - (US) 902-928MHz, on metal; 140cm - (EU) 865-868MHz, on metal;
Warranty:	1 Year

Physical Specification:

Size:	D20mm, (Hole: D2mmx2)
Thickness:	2.1mm without IC bump, 2.8mm with IC bump
Material:	High Temperature Material
Colour:	Black
Mounting Methods:	Adhesive, Screw
Weight:	1.0g

Dimensions:

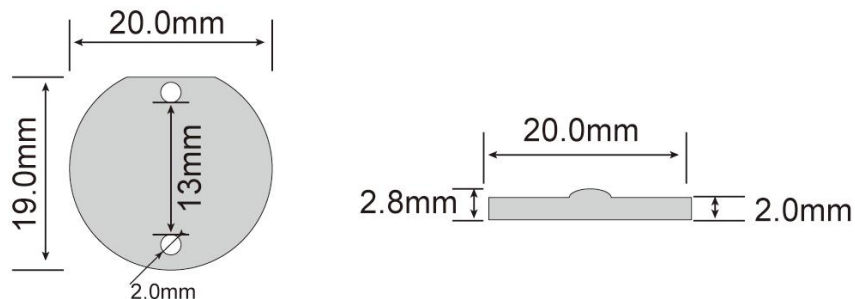


The information contained on this Document is considered to be confidential material proprietary to JYL-Tech, and this information shall not be disclosed, duplicated or copied for any purpose, Nor made available for any third party without the prior consent to JYL-Tech.


Environmental Specification:

IP Rating:	IP6813mm20.0mm2.0mm19.0mm20.0mm2.8m2.0mm
Storage Temperature:	-55°C to +200°C (280°C for 50 minutes, 250°C for 150minutes)
Operation Temperature:	-40°C to +150°C (working 10hours in 180°C)

JYL-HFHP2019U1:

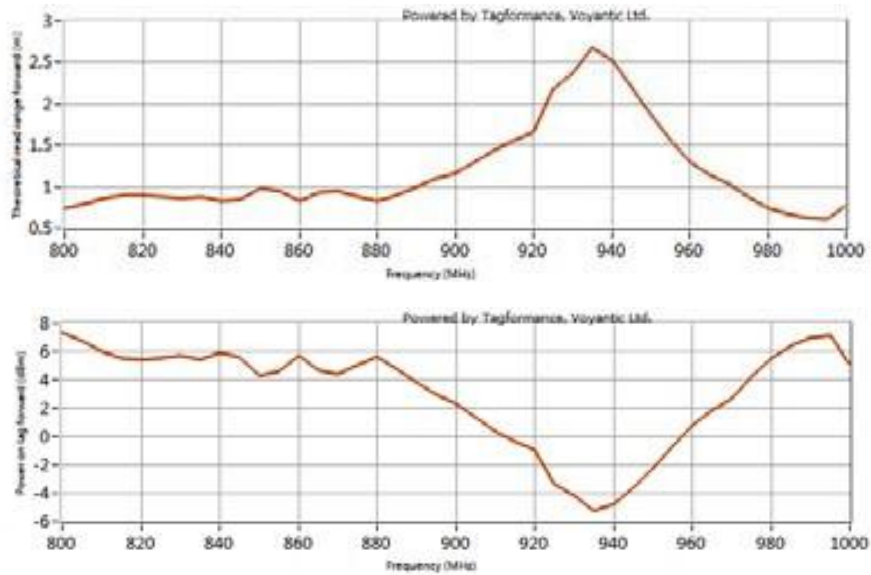

JYL-HFHP2019E1:

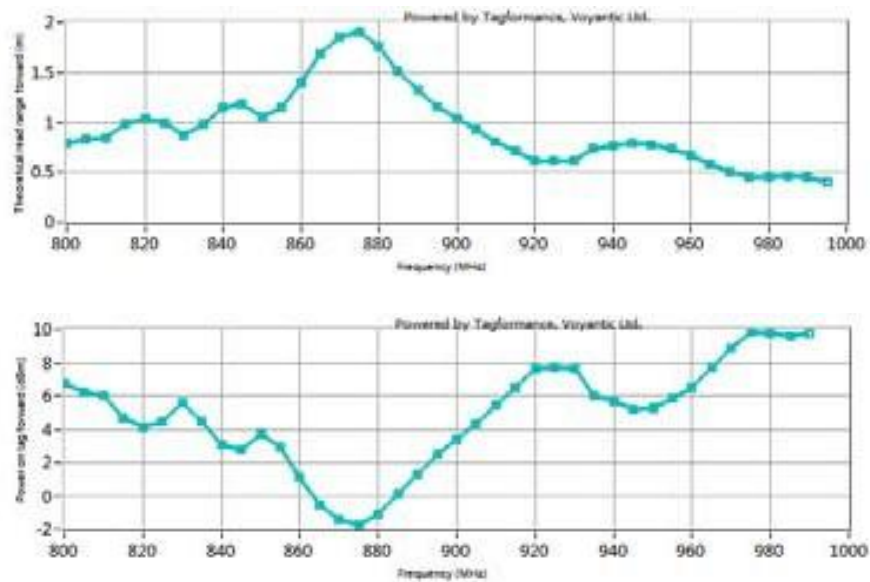

Order information:

JYL-HFHP2019U1:	(US) 902-928MHz
JYL-HFHP2019E1:	(EU) 865-868MHz

The information contained on this Document is considered to be confidential material proprietary to JYL-Tech, and this information shall not be disclosed, duplicated or copied for any purpose, Nor made available for any third party without the prior consent to JYL-Tech.